




GeoCeramica combines the low-maintenance and modern aesthetic of porcelain tile with the ease of installation of concrete pavers. GeoCeramica binds a 1cm porcelain tile to a concrete paver base using a proprietary Aquaferm binding agent.

- Suitable for patios, paths, pool decking and rooftop applications
- Slip-resistant porcelain top layer with multiple faces, integrated Stabilkorn® drainage paver base with small auto-spacers
- Resistant to chemicals, staining, fading, fire, scratching and heavy wear

Colors on back.

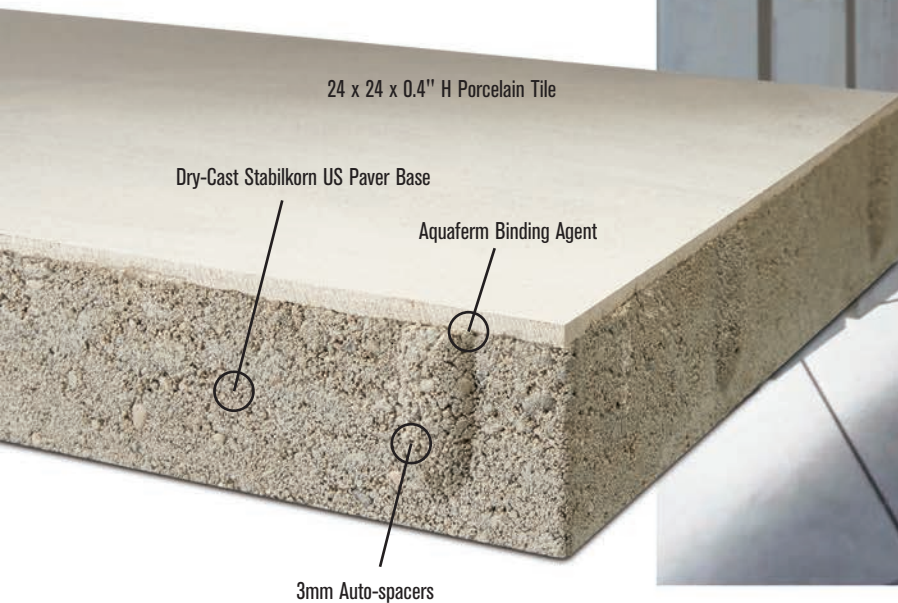

Dimensions	Area (ea.)	Weight (ea.)	Units/pallet	Pallet Weight
24 x 24 x 1.6" H	4 sq. ft.	TBD lbs.	TBD (sq. ft.)	TBD lbs.

Easy to Install...

GeoCeramica installs just like a traditional paver over a densely-graded base, open-graded base or Alliance Gator Base – saving you time and money compared to overlay installation. GeoCeramica pavers are manufactured with a 3mm auto spacer, joints are easily filed with Alliance Gators' G2 Gator Maxx/Super Sand or Nitro Joint Sand. Use Xtreme Edge or Mini-Pro for edging restraint. These pavers can be cut with a water-cooled cut-off saw using a non-segmental diamond blade. Use caution when handling to prevent edge damage. Use roller compactor or buffer pad when compacting. Refer to actual product samples when making color selection.



Manufactured by:

7200 Broadway Ave. N, Rochester, MN 55906
 Phone: 507-288-8850 • Fax: 507-535-1487
rochesterpcp.com



GEOCERAMICA® PORCELAIN + PAVER COLORS

